



# SMA Home Storage

Ease of installation. Long lifetime.  
Seamless integration.



## Future-proof electricity storage system

- Developed for intensive use
- Ready for future, like dynamic tariffs and virtual power plants (VPP)
- Integrated black start function for back-up supply (when combined with the SMA hybrid inverter)
- 10 years of warranty<sup>1)</sup>

## Easy installation, fast commissioning

- Plug and play solution, including automatic commissioning
- Preassembled cables for an easy installation
- Expandable capacity possible within 2 years

## Unmatched flexibility


- Compatible with SMA's hybrid inverters
- Slim, stackable design that can be scaled from 3.2 kWh to 16.4 kW
- Floor, wall or back-to-back mounting
- Outdoor installation possible (Protection class IP65)

The SMA Home Storage Solution allows homeowners to unlock the full potential of sustainable energy. Integrating the SMA Home Storage battery makes the modular solution complete: everything from a single source. It perfectly complements SMA's hybrid inverters enabling energy solutions of today and tomorrow.

Whether during times of low solar irradiation or the highs of mid-day - the SMA Home Storage can store solar power and make it available as needed.

It offers flexible scalability to be adapted to individual needs. With the SMA Home Storage, homeowners are making a conscious choice for quality and additional security with the 10-year warranty<sup>1)</sup>.

1) Device registration via the SMA product registration at [my.sma-service.com](http://my.sma-service.com) required within 30 days after initial commissioning. The conditions of the SMA limited factory warranty apply. You can find additional information at [SMA-solar.com](http://SMA-solar.com).

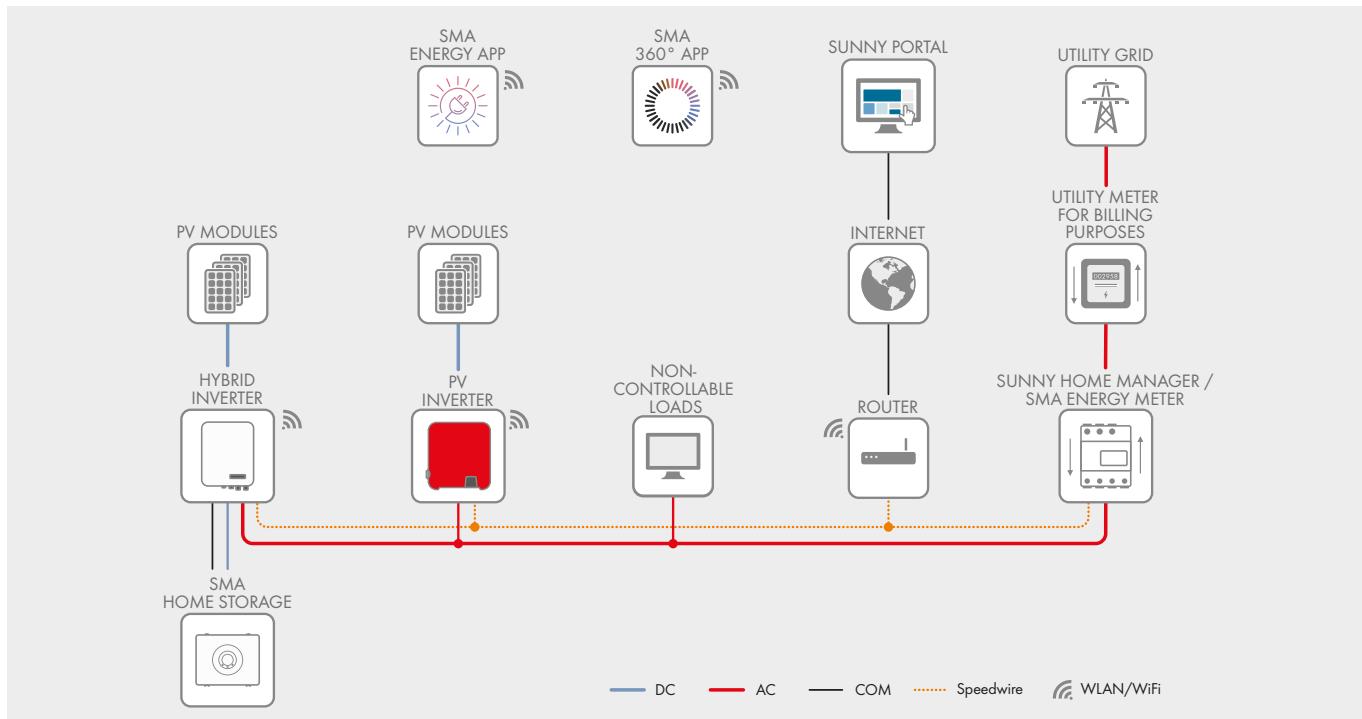

Technical data	SMA Home Storage 3.2	SMA Home Storage 6.5	SMA Home Storage 9.8	SMA Home Storage 13.1	SMA Home Storage 16.4
<b>Electrical</b>					
Usable energy capacity <sup>1)</sup>	3.28 kWh	6.56 kWh	9.84 kWh	13.12 kWh	16.40 kWh
Nominal voltage	96 V	192 V	288 V	384 V	480 V
Operating voltage range	90 V to 108 V	180 V to 216 V	270 V to 324 V	36 V to 432 V	450 V to 540 V
Max. charging / discharging current			36 A		
<b>General data</b>					
Dimensions <sup>2)</sup> (W/H/D)	610 × 483 × 214.6 mm	610 × 969 × 214.6 mm	610 × 1455 × 214.6 mm	2 × (610 × 969 × 214.6) mm	(610 × 1455 × 214.6 mm) and (610 × 969 × 214.6 mm)
Weight	38 kg	76 kg	114 kg	152 kg	190 kg
Operating temperature discharging / charging	-10°C to 50°C / 0°C to 50°C				
Self-consumption (at night) per module	2 W				
Degree of protection (according to IEC 60529)	IP 65				
Max. permissible value for relative humidity (non-condensing)	5% to 95%				
Cell technology	Lithium Iron Phosphate (LiFePO4)				
<b>Efficiency</b>					
Battery efficiency	94.5%				
<b>Protective devices</b>					
Input-side disconnection point	●				
DC reverse polarity protection	●				
Oversupply category battery / inverter	II / II				
<b>Equipment</b>					
DC connection	MC4				
Interface / Communication	RJ45				
Communication protocols	SMA battery interface				
Warranty: 2/10 years	● / ● <sup>3)</sup>				
Certificates and permits (more available upon request)	CE, UN38.3, IEC62619, IEC 62477, VDE2510-50				
Compatible SMA products	STP-SE (SMA Home Storage 6.5 to 16.4), SB-SE (SMA Home Storage 3.2 to 16.4)				
Accessories	Base unit for floor mounting (HS-BU-10), Communication cable to STP-SE (HS-COM-CBL-3-10), Top cover (HS-TC-10)				
Type designation	HS-BM-3.28-10	2 x HS-BM-3.28-10	3 x HS-BM-3.28-10	4 x HS-BM-3.28-10	5 x HS-BM-3.28-10

● Standard equipment    ○ Optional    – Not available    Data at nominal conditions    Last revised: 09/2025

1) Under specific test conditions (100% DOD, 0.2 C charge and discharge at +25 °C).

2) Dimensions for wall mounting. Dimensions with optional base unit can be found in the product manual.

3) Device registration via the SMA product registration at [my.sma-service.com](http://my.sma-service.com) required within 30 days after initial commissioning. The conditions of the SMA limited factory warranty apply. You can find additional information at [SMA-solar.com](http://SMA-solar.com).